









P o w e r e d by N O V A T R O N











A World-Class High-resolution Digital Audio

Premium DSD DXD Audio DAC featuring native DSD file direct playback, Music Server with database, CD Ripper, Network Streamer


- Playback of DSD64 (2.8224MHz), DSD128 (5.6448MHz), DXD (24bit/352.8KHz), PCM signal up to 32bit/384KHz including 24bit/192KHz WAV/FLAC and full range of hi-res audio file formats
- ES9018K2M Sabre³² Reference DAC built-in
- XMOS 32Bit/500MIPS digital signal processing unit
- Phono INPUT (Moving Magnet) for turntable
- Load your vinyl and cassette tape collections to the X40 in 192kHz sample rate
- Music Streaming Services like Qobuz, Simfy and Internet Radio.
- UPnP Media Server & Renderer for streaming playback and control remotely via network.
- 5 inch full color TFT LCD for intuitive GUI
- HDMI Out connector for using an external screen like TV as its GUI screen
- Supports up to 3.5" SATA hard disk 4TB, 2.5" hard disk and SSD
- Toroidal transformer minimizing idle noise
- FM Radio Tuner built-in
- Recording with hi-res 24bit/192KHz sample rate
- Provides the customized Web Interface(WebUI) for remote control and MusicDB management
- Works with various free apps available at app stores
- Rugged chassis construction with 12mm thickness aluminum front
- Versatile software functionalities









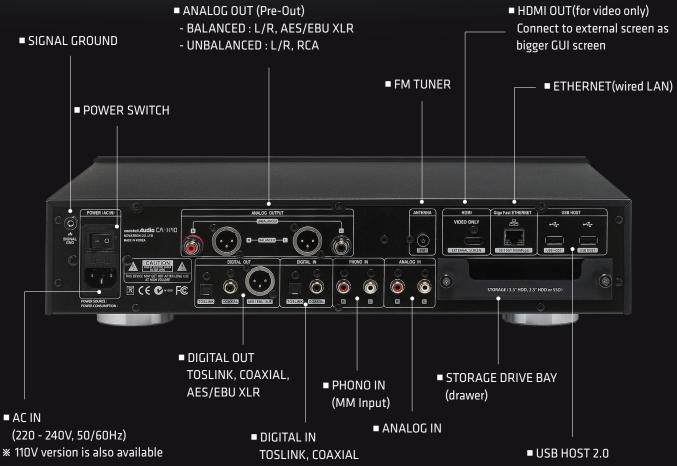



• A World-Class Premium DSD DAC (Digital to Analog Converter)

The X40 applies ESS Sabre DAC ES9018K2M cooperating with XMOS 32Bit/500MIPS Digital Signal Processor.



- SABRE³² Reference DAC ES9018K2M Patented 32bit Hyperstream DAC
- 127dB DNR
- · -120dB THD+N



• XMOS 32Bit/500MIPS Digital Signal Processing unit



• Toroidal Transformer

The power supply features toroidal transformer minimazing idle noise.



• High quality Analog Out terminal

The high quality analog out terminal guarantees lossless singal transmission. Enjoy ultra high quality sound via Analog Out and Headphone Out of the X40



Balanced & Unbalanced Analog Out (Pre-Out)

- Unbalanced RCA, L/R, Pre-Out, Dynamic Range: -120dB THD+N (Max 2Vrms, Stereo), 127dB DNR
- Balanced AES/EBU XLR, L/R, Pre-Out, Dynamic Range:
 -120dB THD+N (Max 4.5Vrms, Stereo), 127dB DNR




Headphone Out

6.35mm jack, 500mW+500mW at 1KHz, 32 ohm, 0.1% THD









• Phono IN (MM Input)

Connect turntable to the X40 Phono IN directly to play or record. Load your vinyl collections to the X40 in 192KHz, 96KHz or 48KHz sample rate and even edit them after recording





• Hi-res digital output / input (24bit/192kHz)

HDMI Out connector for external screen as GUI screen

Connect to your TV to view bigger GUI or a slideshow of









• HDMI OUT for external screen

Connect external big screen through HDMI out





Aluminum CNC cutting

Front panel is based on 12mm thickness aluminum by CNC cutting. Volume knob and button are all aluminum by CNC cutting



• FM Radio Tuner

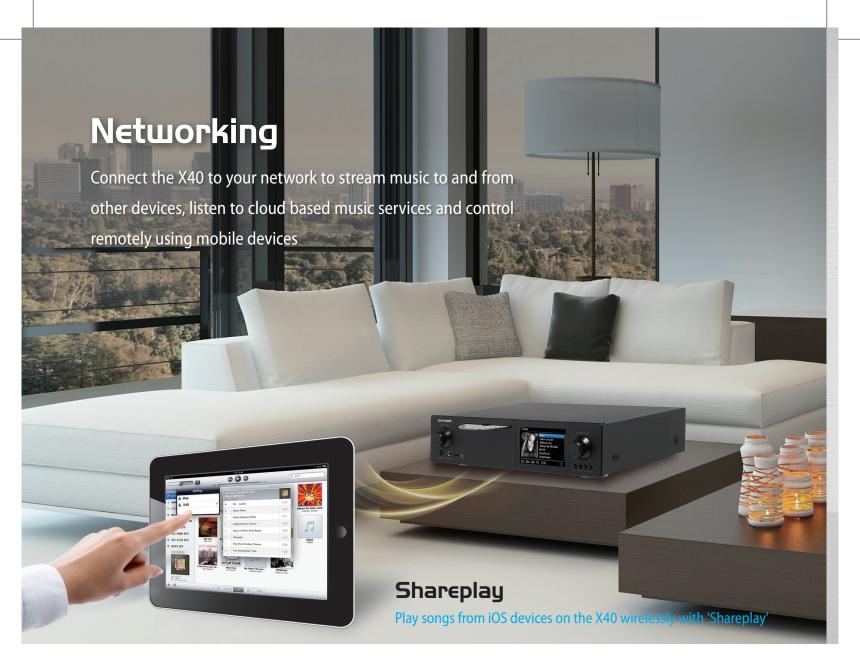

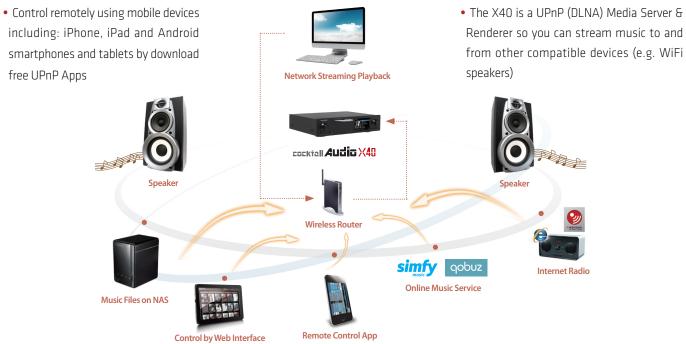

- Use the cocktailAudio Web Interface to control the X40 and manage the Music DB remotely
- Manage your files (Copy, move or delete) over a network thanks to support for Samba
- Access music streaming services: Qobuz, Simfy and Internet Radio





Buillt-in Music Database

The X40 has a well-organized Music Database built-in. Display all songs by album, artist, genre, composer or title and even search



• Up to 4TB internal storage

The X40 supports up to 4TB 3.5" and 2.5" SATA HDDs (Hard Disk Drives) and also SSDs (Solid State Drives)



| Storage Drive Bay |



3.5inch HDD




2.5inch HDD




2.5inch SSD





• Record in 192KHz sample rate

Record from Analog IN, AUX IN, FM Radio and iRadio to high quality digital file like 192KHz sample rate



• Reservation Recording

Schedule when you want the X40 to record iRadio with reservation recording



Edit recorded files

Edit recorded files cutting by unit of track or adding album tag info



Audio file format conversion

Convert existing audio files into other formats, (e.g. MP3, FLAC, WAV, M4A) for use on other devices - MP3 player, car stereo, etc



Gapless Playback



Section Repeat

Set specific section to play repeatedly




Photo Slideshow

Photo slideshow while listening to your tracks



Resume Play

After booting up, resume playing automatically where it was last stopped.



Scroll Speed

Control text scroll speed on the screen



HDD Format

Easy solution to format hard disk with Linux file system or NTFS



• Import & Export your music

Import/Export music to/from the X40 Music DB via USB or over a network



• Edit music tag info



Make Playlist



• Music DB backup & Restore



Make 'My Playlist'

This is virtual playlist



Auto Shutdown

Schedule when you want the X40 powered off



HDD Sleep

Go into sleep mode as set



USB Keyboard

Use an USB keyboard to edit song tag info easily

SPECIFICATION

| Model name | CA-X40 | | | | Remarks | |
|-----------------------------------|---|--|---|-----------------|---------------------------------|--|
| Host CPU & Memory | Embedded 700Mhz MIPS | | | | | |
| | Main Memory (4Gbit, DDR2 800Mhz) | | | | | |
| | Firmware Memory (4Gbit) | | | | | |
| CD Player | Type Front Loading | | | | | |
| CD Player | Supported med | Supported media CD, CD-DA, CD-R, CD-RW, DVD-R/RW | | | | |
| Display | 5" TFT LCD (800x480 pixel) | | | | | |
| | External screen to be connected through HDMI connector | | | | | |
| Interface | Remote Control, PC, iOS & Android devices with customized Web Interface (WUI) or various free UPnP Tablet & Smartphone Apps | | | | | |
| ANALOG OUT | Balanced (Pre-out) | AES/EBU XLR, Dynam 127dB DNR | AES/EBU XLR, Dynamic Range : -120dB THD+N (Max 4.5Vrms, Stereo), 127dB DNR | | DAC IC : | |
| | Unbalanced (Pre-out) | RCA L/R, Dynamic Rai | RCA L/R, Dynamic Range : -120dB THD+N (Max 2Vrms, Stereo, 127dB DNR | | | |
| | Headphone Out | 6.35mm jack, 500mW+500mW@1Khz, 32 ohm, 0.1% THD | | | SABRE ³² | |
| DIGITAL OUT | Toslink x 1 | | Sample Rate : up to 24bit/192Khz | | | |
| | COAXIAL x 1 | | SPDIF 75ohm RCA, Sample Rate : up to 24bit/192Khz | | Max OdB, Volume controllable | |
| | AES/EBU XLR x | 1 110ohm, Sample Rate | 110ohm, Sample Rate : up to 24bit/192Khz | | | |
| DIGITAL INPUT | Toslink x 1 | Sample Rate : up to 24 | Sample Rate : up to 24bit/192Khz | | | |
| | COAXIAL x 1 | Sample Rate : up to 24 | Sample Rate : up to 24bit/192Khz | | | |
| PHONO IN | MM Input | Sensitivity 7.5mV | Sensitivity 7.5mV | | | |
| ANALOG INPUT | LINE IN x 1 | | L & R RCA at the rear, 2V rms | | | |
| | AUX IN x1 | | 3.5mm Phone Jack on the front, 800mV rms | | | |
| TUNER | FM Radio | | Tuning Range (FM 87.5 - 108MHz) FM Antenna input Impedance : 75ohm unbalance | | | |
| Connectivity | 3 x USB Host po | orts | Front | 1x USB Host | | |
| | р | | Rear | 2x USB Host | | |
| | Network | Wired | | | | |
| | | Wireless (Optional) | * 801.11b/g/n WiFi USB dongle (Optional) | | | |
| | HDMI OUT (video only) | | onnecting to external big screen like TV for GUI display and photo slide show | | | |
| POWER SUPPLY | Audio Power Su | · · · · · | Toroidal Transformer, Power 75W | | | |
| | Standby Power | | 5V/1A SMPS Removable storage tray (drawer) is provided. | | | |
| Supported Storage | Hard Disk | 2.5" SATA, up to 4TB | | | | |
| | | 3.5" SATA, up to 4TB | | | | |
| | SSD 2.5" SATA, up to 4TB | | | | | |
| Supported audio Codec & format | DSD64 (2.8224MHz), DSD128 (5.6448MHz), DXD (24Bit/352.8KHz), up to 32Bit/384KHz PCM signal including HD FLAC (24Bit/192KHz), HD WAV (24Bit/192KHz), APE/CUE, WAV, FLAC, ALAC, AIFF, AIF, AAC, M4A, MP3, WMA, Ogg Vorbis, PCM, M3U, PLS, etc | | | | | |
| Network Protocol supported | UPnP (DLNA) Server/Client/Media Renderer, Samba Server/Client, FTP Server, Web Server, etc | | | | | |
| Internet Service | Internet Radio Reciva Internet Radio | | | | | |
| | Online Music Qobuz, Simfy Service ** Subscription required | | | | | |
| Cupported | Service * Subscription required English, German, French, Spanish, Italian, Polish, Czech, Dutch, Traditional Chinese, Russian, | | | | | |
| Supported OSD Lang. | Danish, Korean, etc (To be added by request) | | | | | |
| Power Source | AC 220V - 240V, 50/60Hz (For Europe) ** 110V version is also available. | | | | | |
| Mechanical | l – | Front | 12mm thickness aluminum by CNC cutting | | | |
| | | Knob | Aluminum by CNC cutting | | | |
| | | Chassis | Metal | | | |
| | Dimension - | without foot | 435mm(W) x 325m | ım(D) x 88mm(H) | | |
| | Dimension | with foot | 435mm(W) x 325mm(D) x 98.5mm(H) | | | |
| Certificate | CE, FCC, EMI, etc | | | | | |

 $[\]begin{tabular}{ll} \divideontimes \ \, \text{Specification to be changed without notification} \end{tabular}$



